

FRX4



PRODUCT DATA SHEET

SACO FIBER RECEIVER | CONTROLS

SACO

FRX4

SPECIFICATIONS



PHYSICAL

CONSTRUCTION	Black finish aluminum housing
MOUNTING	35mm DIN rail
WEIGHT	0.83lb (375g)

THERMAL

OPERATING TEMP	-40 °F to 140 °F (-40°C to 60°C)
HEAT CONTROL	Convection cooling
STORAGE	-40°C + 60°C 5%-95% RH non-condensing

ELECTRICAL

INPUT VOLTAGE	12VDC Typical
POWER	10W without SFP+

CONSUMPTION

CONNECTORS

AC INPUT	Terminal block, pluggable 2 poles
DATA INPUT	SFP+ Duplex LC
DATA OUTPUT	RJ45

COMMUNICATION

VIDEO PROTOCOL	SACO V-STREAM™
VIDEO PROCESSING	12-bit/color @ 60fps

CERTIFICATION

IEC 62368-1



Designed and manufactured in North America.


Specifications and characteristics shown in this document reflect the product baseline. Some specifications and characteristics can be modified and/or improved if requested by the client.

V1.4-2023-05


SACO

FRX4

DIMENSIONS

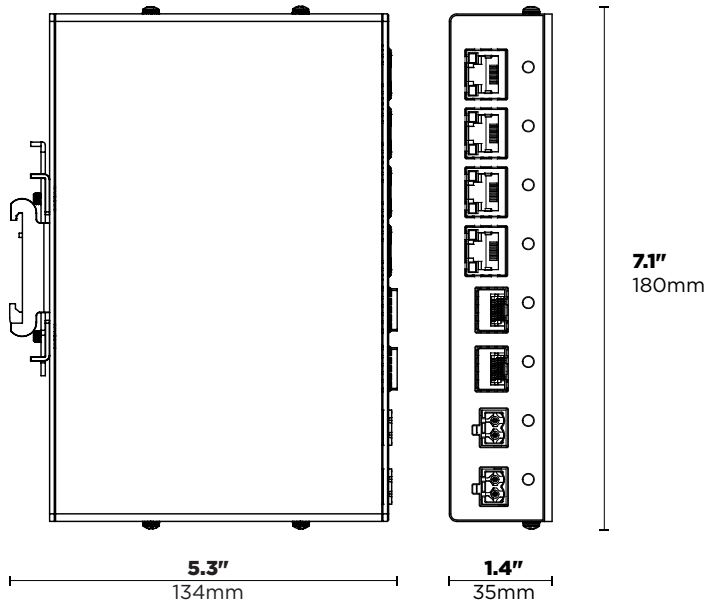

CONTROLS & INDICATORS

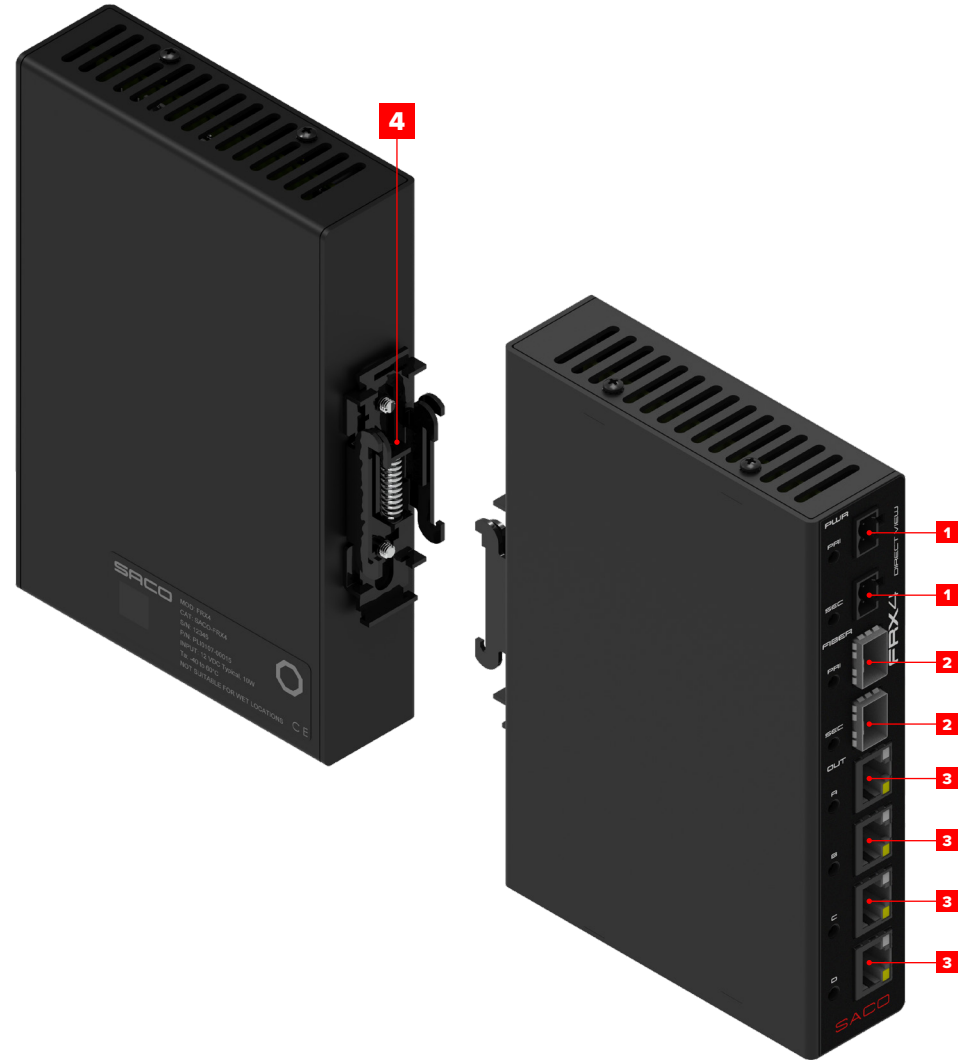

- 1 DC Power Input
- 2 SFP+
- 3 RJ45

- 4 DIN Rail mounting clip



Designed and manufactured in North America.

Specifications and characteristics shown in this document reflect the product baseline. Some specifications and characteristics can be modified and/or improved if requested by the client.

V1.4-2023-05

SACO

SACO

SACO TECHNOLOGIES INC.

6000, Route Transcanadienne
Montréal, QC
Canada, H4T 1X

t 514.745.0310

e info@saco.com

w saco.com

Copyright © 2022 by SACO. All Rights Reserved. All specifications subject to change without notice. Information furnished by SACO is believed to be accurate and reliable. However, SACO shall not be held responsible or liable for its use, nor for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or other rights by SACO.